STRATCO OUTBACK®

OUTBACK COOLDEK® INSULATED ROOFING

COOLDEK - A BREAKTHROUGH INNOVATION

Control the climate with Stratco's innovative Cooldek insulated panel. Cooldek provides roofing, insulation and a beautiful ceiling all in one product. Cooldek is designed to be strong enough to span significant lengths unsupported while providing outstanding thermal performance. Cooldek is relatively simple to install, and even has an inbuilt rebate to conceal electrical wiring for fans and light fittings.

INSULATED ADVANTAGE FOR COOLING COMFORT

Stratco Cooldek roofing features a polystyrene core that is permanently bonded to a smooth, easy to clean coloured steel underside and a profiled, coloured steel topside. The insulating properties of Cooldek reduce heat from above on hot days which significantly increases comfort levels under the roof. It also reduces noise from heavy rain and will aid in keeping the interior of your home cool, reducing your energy costs and your carbon footprint.

IMPRESSIVE STRENGTH, INCREDIBLY LONG SPANS


Exceptional strength allows Cooldek to span up to an impressive 7.2 metres unsupported. These large spans reduce the number of beams and framework required, which offers you an uncluttered appearance and clear views.

MANY OPTIONS AVAILABLE

You have two top profiles to choose from; either the traditional corrugated shape of Cooldek CGI or the high performance decking shape of Cooldek Classic. For the underside contour, there is a choice of smooth or two ribbed finishes. The underside is available in white or a choice of high gloss colours.

You can choose from three insulation thicknesses; 50mm, 75mm and 100mm, for increasing levels of insulation and greater spanning capabilities. The topside colour choices include a wide range of popular colours to integrate your patio into existing colour schemes.


R Value (m2K/W) at 14°C Mean Temp. 50mm Panel 1.27 1.48 1.91 2.11 2 54 2 75	COOLDEK INSULATION RATING (R VALUE)				
(m2K/W) at 14°C 75mm Panel 1.91 2.11 Mean			Cooldek Classic	Cooldek CGI	
at 14°C 75mm Panel 1.91 2.11 Mean	(m2K/W) at 14°C Mean	50mm Panel	1.27	1.48	
		75mm Panel	1.91	2.11	
200111111 01100		100mm Panel	2.54	2.75	

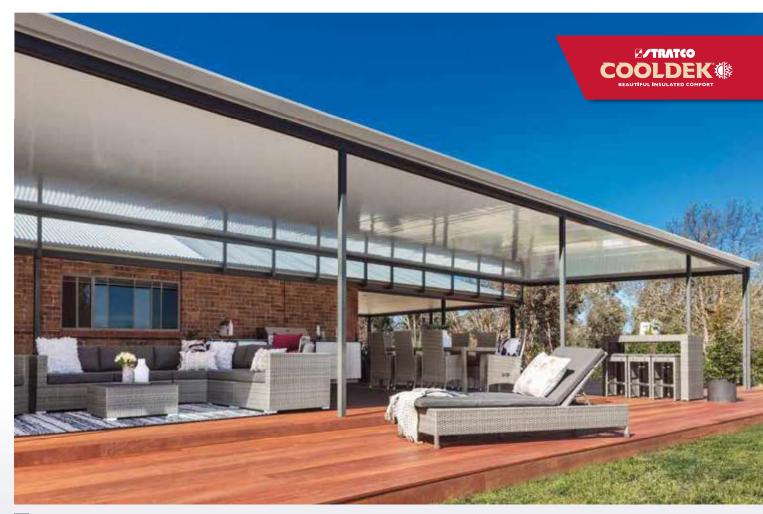



COOLDEK PANEL OPTIONS





PROFILE CROSS SECTIONS



50mm COOLDEK CGI PANEL



50mm COOLDEK CLASSIC PANEL

Both profiles are available in 50, 75 or 100mm insulation thickness.

CEILING PROFILES

SMOOTH

V-GROOVE

SILKLINE





